




### ■ Specification

### ■ Features


- ✚ Four 12VDC individually fused outputs
- ✚ Circuit Short protection
- ✚ High-temperature protection
- ✚ AC power LED indicator
- ✚ Individual LED's for each output
- ✚ Power ON/OFF switch
- ✚ Unit maintains camera synchronization
- ✚ Easy installation saves time and eliminates costly labor
- ✚ Spare fuses included
- ✚ 2 years warranty

Input Voltage	AC90-264V
Input Voltage Frequency	50/60Hz
<b>Output Specification</b>	
Output Voltage	12VDC+10%
Total Output Current	25A
Total Outputs	300W
Fuse Type	PTC Fuse
Fuse Rating	1Amps / 250VAC
<b>Protection</b>	
General Protection	each output has individual fuse and LED indicator, when problem occurs, only affect the individual output, other outputs still working
Circuit Short Protection	when short condition occurs, individual fuse will open the circuit, when condition removed, PTC fuse will automatically back to close.
Over-load protection	105-135% hiccup mode, auto-recovery
Over-voltage protection	115-135%, Shut down o/p voltage, re-power on to recover
<b>General Specifications</b>	
Working temperature and humidity	-10℃~+60℃, 20%~80%RH
Store temperature and humidity	-20℃~+85℃, 10%~90%RH
<b>Application</b>	
CCTV	Camera, PTZ, IR Illuminators, Video Process Equipment, etc.

### ■ Shape and installation dimension

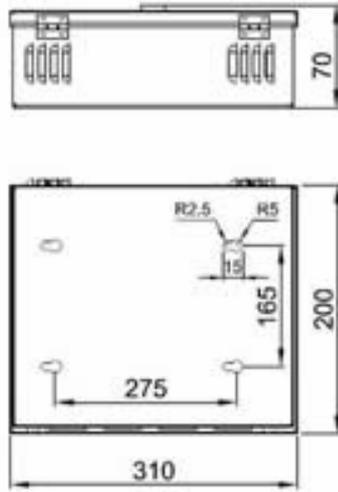

■ Manual

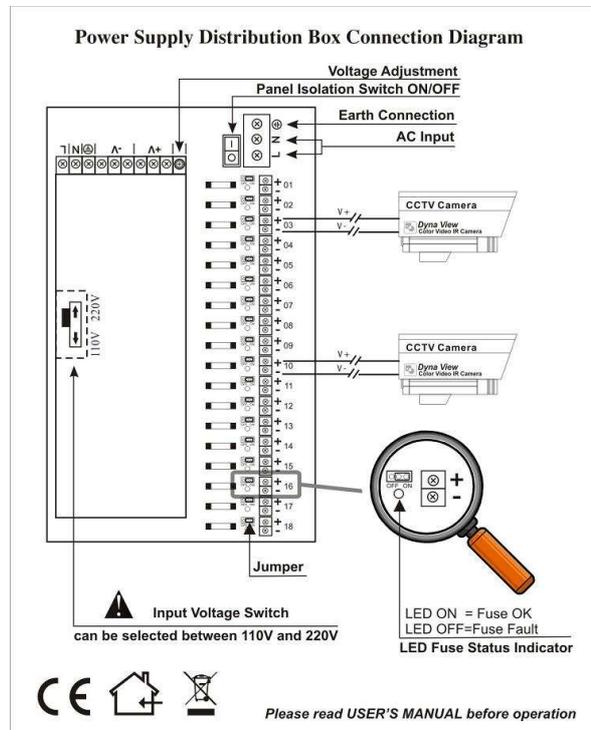

18CH标贴

**Multiple View, More attention!**

**Mulview Technology Limited**

<http://www.mtlcctv.com>

TEL:0086-755-88849659 FAX:0086-755-83722362 E-mail:mulviewcctv@gmail.com,sales@mtlcctv.com