

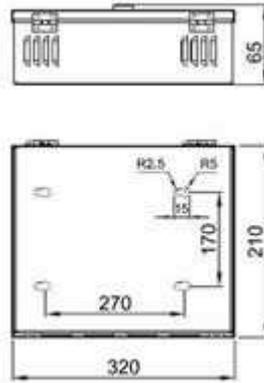

■ Features

- ✚ Four 12VDC individually fused outputs
- ✚ Circuit Short protection
- ✚ Over-load protection
- ✚ AC power LED indicator
- ✚ Individual LED's for each output
- ✚ Power ON/OFF switch
- ✚ Unit maintains camera synchronization
- ✚ Easy installation saves time and eliminates costly labor
- ✚ 100% full load burn-in test
- ✚ Spare fuses included
- ✚ 2 years warranty

■ Specification

Input Voltage	AC90-130,172-264V for all world input
Input Voltage Frequency	50/60Hz
Output Specification	
Output Voltage	12 VDC+10%
Total Output Current	12A(1A/output,16channels for 16 sets security cameras)
Total Outputs	200W
Fuse Type	Glass Fuse
Fuse Rating	1 Amps / 250VAC
Protection	
General Protection	each output has individual fuse and LED indicator, when problem occurs,only affect the individual output, other outputs still working
Circuit Short Protection	when short condition occurs, individual fuse will open the circuit,when condition removed, replacing another new fuse will back to close.
Overload protection	125%-165% hiccup mode,auto-recovery
Over-voltage protection	115%~135%
General Specifications	
Working temperature and humidity	-10℃~+60℃ (Refer to output derating curve) , 20%~90%RH
Store temperature and humidity	-20℃~+85℃,10%~95%RH
Application	
CCTV	Camera, PTZ, IR Illuminators, Video Process Equipment, etc.

■ **Shape and installation dimension**



■ **Manual**

Multiple View, More attention!

Mulview Technology Limited

<http://www.mtlcctv.com>

TEL:0086-755-88849659 FAX:0086-755-83722362 E-mail:mulviewcctv@gmail.com,sales@mtlcctv.com